
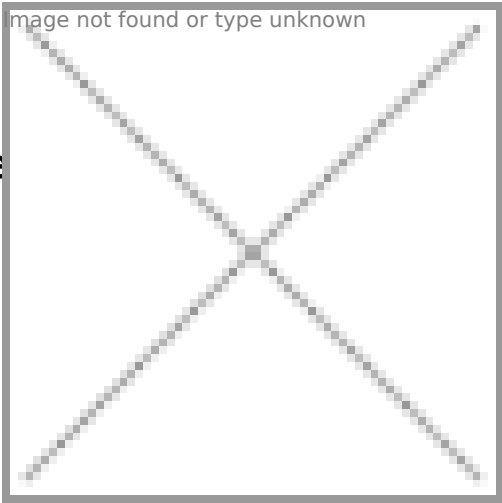


AIRDUC PUR 350 AS me

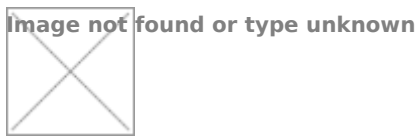

abrasive powder, bulk material, granulate

g machine (PCB)

r supply, air supply cabinet

air supply: oven dryer, ink dryer

- extraction unit, dedusting system, filter system, oil mist extraction
- chemical industry: chemical vapours, vapour return hose at loading arm, paint steam, spray mist extraction
- explosion hazard area
- textile industry, fiber extraction: spinning machine, knitting machine, weaving loom machine
- animal stall, animal shed: barn ventilation
- clean room ventilation, semiconductor production machine
- compressor, side channel blower, vacuum pump, pressure pump, pump
- surface preparation: shot blasting/ sand blasting recovery e.g. at blasting chamber, ship yard, stripping machine, flooring preparation machine, grinding machine
- municipal vehicle: sweeper, sweeping machine
- municipal vehicle: lawn mower, slope mower, leaf blower/ leaf collector
- scrubber, floor cleaning machine
- heating hose: exterior hose as protection hose

PROPERTIES

- highly abrasion resistant
- medium-heavy duty
- microbe resistant
- good resistance to oil, gasoline and chemicals
- very good low temperature flexibility
- flame-retardant according to: UL94-V2 & DIN 4102-B1
- permanently antistatic wall: according to ISO 8031 electrical and surface resistance $<10^9 \Omega$ (according to TRGS 727 $<2,5 \cdot 10^8 \Omega \cdot m$ and NFPA 652 $10^8-10^9 \Omega$)
- in accordance with ATEX 2014/34/EU (1999/92/EC) and German TRGS 727: pneumatic transport of flammable dusts and bulk materials (Zone 20, 21, 22 inside), aspiration of combustible dusts (Zone 22 inside),
- in accordance with ATEX 2014/34/EU (1999/92/EC) and German TRGS 727: for conveying for flammable liquids (inside zone 0, 1, 2), for conveying for non-flammable liquids, for use in zone 1 and 2 (gases), for use in zone 0 (gases)
- conforms to the safety regulations of the German Wood Trade Association

- according to DIN 26057 Type 2
- conforms to RoHS guideline
- REACH according to --> Technology /
-

DESIGN


- AIRDUC® profile hose
- 1. spring steel wire firmly embedded
- 2. wall: permanently antistatic premi
(®)
- 3. wall thickness 0,7 mm approx.
-

DELIVERY VARIANTS

- further diameters and lengths available on request
- transparent (standard)
- special colours: full coloured
- customer-specific branding
-

TEMPERATURE RANGE

- -40°C to 90°C
- short time to 125°C

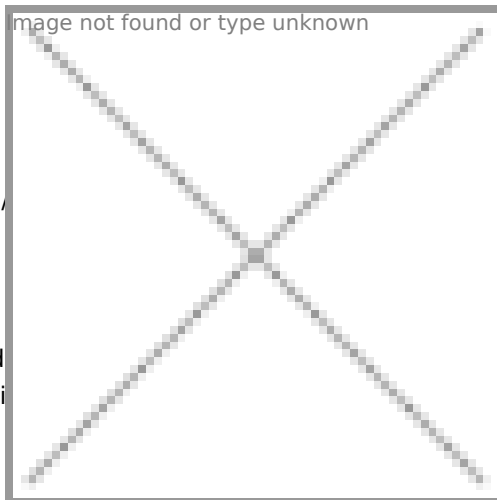

Temperatur: -40°C / +90°C (short time +125°C)

Construction: Poliurethane, transparent, with steel spiral, inside almost smooth, straight wall, outside corrugated

Electrical resistance: permanently antistatic wall: according to ISO 8031 electrical and surface resistance

Wall thickness: 0,7 mm

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Külső Ø (mm)	Vákuum (bar)	Hajlítási sugár (mm)	Nyomás 20°C-on (bar) (50% nyúlás)	Súly (kg/m)	Cikkszám
25	32	-0,75	23	2,44	0,19	350-0025-1002
30	37	-0,63	26	2,05	0,25	350-0030-1002
32	39	-0,59	27	1,93	0,27	350-0032-1002
35	42	-0,54	29	1,77	0,29	350-0035-1002
38	45	-0,49	31	1,63	0,31	350-0038-1002
40	47	-0,47	32	1,55	0,33	350-0040-1002
45	52	-0,42	35	1,39	0,37	350-0045-1002
50/51	57	-0,38	38	1,25	0,4	350-0050-1002
55	62	-0,34	41	1,14	0,44	350-0055-1002
60	67	-0,31	44	1,05	0,48	350-0060-1002
63/65	70	-0,29	47	0,97	0,52	350-0065-1002
70	77	-0,18	50	0,9	0,56	350-0070-1002
75/76	82	-0,17	53	0,84	0,59	350-0075-1002

