
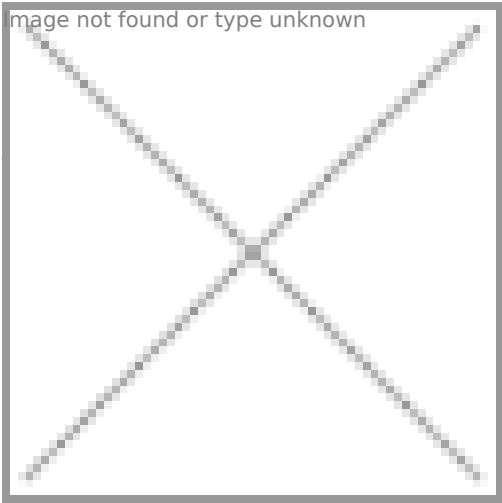


# AIRDUC PVC 341 with s duty

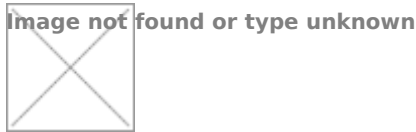

# c suction hose medium

gas and chemical gases and works, for  
use. It is flexible and crush resistant, we do  
sparks.

- flexible hose/ ducting for gases and for dust, powder, fibres
- extraction unit, dedusting system, filter system, oil mist extraction
- galvanic extraction
- chemical industry: chemical vapours, vapour return hose at loading arm, paint steam, spray mist extraction
- heating hose: exterior hose as protection hose

## PROPERTIES

- medium-heavy duty
- good resistance to alkalis and acids
- good resistance to chemicals
- flame-retardant according to: UL94-HB
- phthalate-free
- conforms to RoHS guideline
- REACH according to --> Technology / Technical Information / REACH

## DELIVERY VARIANTS

- further diameters and lengths available on request
- grey (standard)
- special colours: transparent, full coloured
- customer-specific branding

## DESIGN

- AIRDUC® profile hose
- 1. spring steel wire firmly embedded in wall
- 2. wall: high grade soft PVC
- 3. wall thickness 0,9 mm approx.

## TEMPERATURE RANGE

- -20°C to 70°C
- short time to 80°C


**Hőállóság:** -20°C/+70°C / rövid ideig +80 C

**Felépítés:** Airduc-profil, beágyazott acéldrót spirállal, kb. 0,9 mm falvastagság

**Hajlítási sugár:** Kb 1×belső Ø

**Tekercsméret:** Standard 10 m, némely méretben 5 m

On stock at the manufacturer, short delivery possible

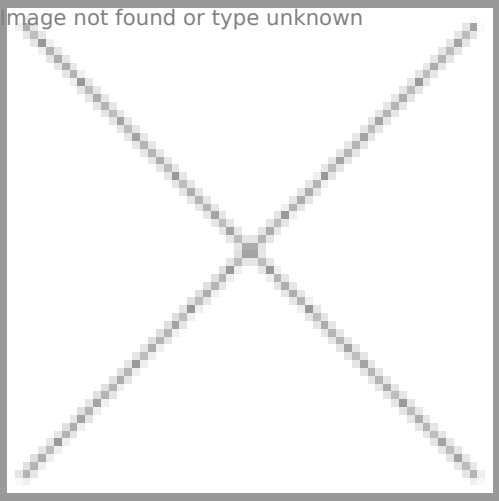

| ID      | OD  | Vákuum (bar) |      | Méret (m) | Cikkszám      |
|---------|-----|--------------|------|-----------|---------------|
| 20      | 27  | 5            |      | 10        | 341-0020-0000 |
| 25      | 32  | 0,4          |      | 10,15     | 341-0025-0000 |
| 32      | 40  | 0,26         | 0,27 | 10,15     | 341-0032-0000 |
| 38      | 46  | 0,22         | 0,32 | 10        | 341-0038-0000 |
| 40      | 48  | 0,2          | 0,33 | 10        | 341-0040-0000 |
| 42      | 50  | 0,2          | 0,35 | 10,15     | 341-0042-0000 |
| 50-51   | 58  | 0,16         | 0,41 | 10,15     | 341-0050-0000 |
| 55      | 63  | 0,15         | 0,45 | 10,15     | 341-0055-0000 |
| 60      | 68  | 0,14         | 0,49 | 10,15     | 341-0060-0000 |
| 63-65   | 73  | 0,12         | 0,52 | 10,15     | 341-0065-0000 |
| 70      | 79  | 0,12         | 0,54 | 10,15     | 341-0070-0000 |
| 75-76   | 84  | 0,11         | 0,58 | 10,15     | 341-0075-0000 |
| 80      | 89  | 0,1          | 0,61 | 10,15     | 341-0080-0000 |
| 89-90   | 99  | 0,09         | 0,7  | 10,15     | 341-0090-0000 |
| 100-102 | 109 | 0,06         | 0,85 | 10,15,20  | 341-0100-0000 |
| 105     | 114 | 0,06         | 0,89 | 10,15     | 341-0105-0000 |
| 110     | 119 | 0,05         | 0,94 | 10,15     | 341-0110-0000 |
| 114-115 | 124 | 0,05         | 0,98 | 10        | 341-0115-0000 |
| 120     | 129 | 0,05         | 1,02 | 10,15     | 341-0120-0000 |
| 125-127 | 134 | 0,04         | 1,06 | 10,15     | 341-0125-0000 |
| 130     | 139 | 0,04         | 1,1  | 10        | 341-0130-0000 |
| 140     | 149 | 0,04         | 1,18 | 10        | 341-0140-0000 |
| 150-152 | 159 | 0,04         | 1,26 | 10,15     | 341-0150-0000 |
| 160     | 169 | 0,03         | 1,35 | 10,15     | 341-0160-0000 |
| 178-180 | 189 | 0,03         | 1,51 | 10,15     | 341-0180-0000 |
| 200-203 | 209 | 0,03         | 1,67 | 10,15     | 341-0200-0000 |
| 225     | 234 | 0,02         | 2,26 | 10,15     | 341-0225-0000 |
| 250     | 259 | 0,02         | 2,51 | 10        | 341-0250-0000 |
| 350     | 359 | 0,01         | 3,5  | 10        | 341-0350-0000 |

