
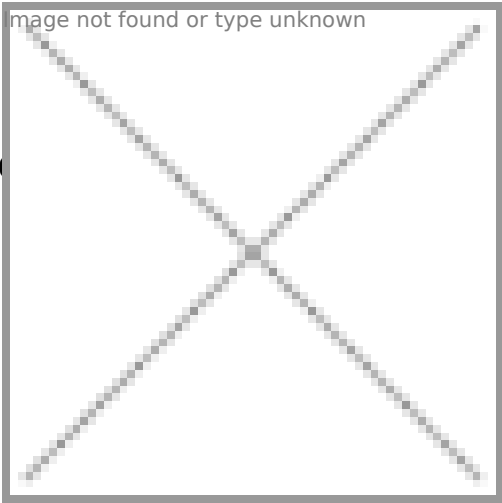


Carboflex ® / EN Oil and gas truck hose

ion/discharge tanker

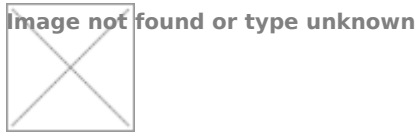

products, up to max 50% aroma content.

FACTURERS NAME EN 12115:2011 NBR-1 -
F 131/T2 P5.5 - QUARTER/YEAR

- Operating pressure: 16 bar
- Bursting pressure: 64 bar
- Heat resistance: -30°C/+90°C
- Interior: NBR? Black, smooth
- Exterior: CR, black, fabric imprinted
- Linings: steel wire helix
- Vacuum: -0,9 bar
- Electrical resistance: < 106 Ω
- Átmenő ellenállás: < 109 Ω
- Standard: EN 12115:2011 and TRbF131 part 2. 5.5 §

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Tekercsméret (m)	Cikkszám
25	6	37	40	3356 025000
32	6	44	40	3356 032000
38	6,5	51	40	3356 038000
50	8	66	40	3356 050000
63,5	8	79,5	40	3356 063000
75	8	91	40	3356 075000
100	8	116	40	3356 100000