
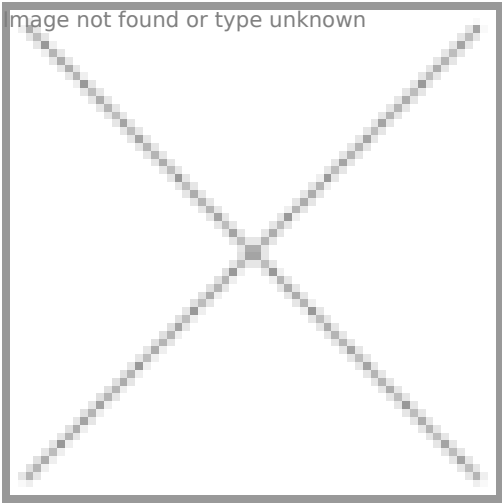


Cleaning gun usable in

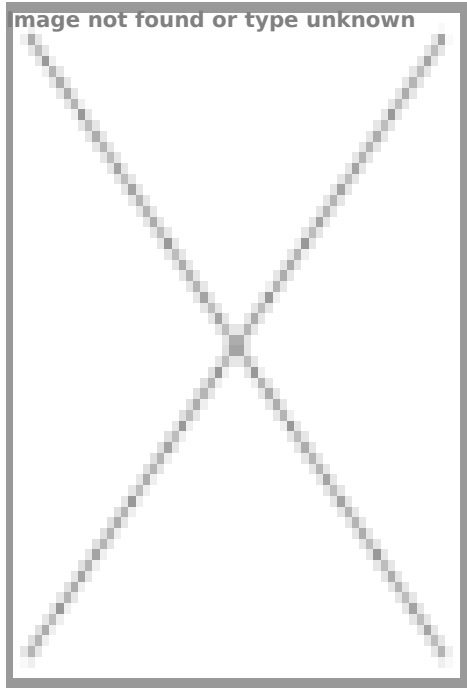

on 160C

ceutical industry cleanings, and the nozzle
ore the next use.

er flow control, with 10 l/min on 1 bar 75 l

irection of the dispersion.

Size of the interface: input interface 1/2" female thread

Operating pressure: 24 bar

Heat resistance: +95 °C

Structure: stainless steel housing, silicone rubber cover, stainless steel
lever

Weight: 0,87 kg

Flow: 1 bar: 10 l/min, 24 bar: 75 l/min

Sealing: Viton

Material	Colour	Article number
stainless steel	light blue	350128