
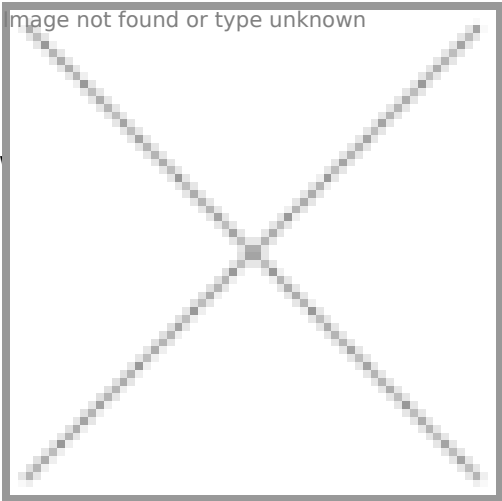


Female quick coupling
pneumatic couplig

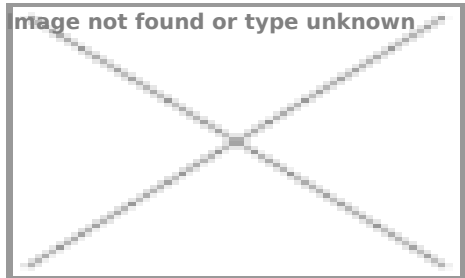

quick coupling,

sign until it's in stock or for order.

- Operating pressure:** Max. 35 bar
- Heat resistance:** -20 / +100 °C
- Flow:** max. 100 l/m
- Design:** with valve
- Compatible:** with Rectus 25-26 series
- Not compatible:** with Orion 44510
- Sealing:** NBR

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

Nickel-plated brass

Male thread	Article number
G 1/4"	131031
G 3/8"	131005
G 1/2"	131004

Brass

Male thread	Article number
G 1/4"	101047
G 3/8"	101048
G 1/2"	101049