
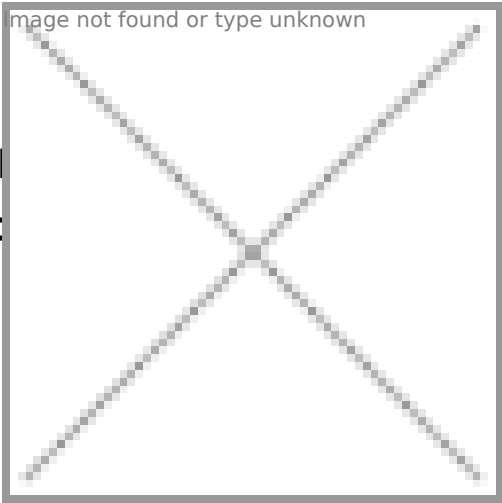


HOTCALOR BLUE and R
machine, works with ho

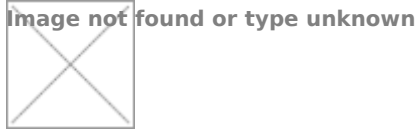

ection molding

lastic industry’s tempering liquid of the
d and hot line can be easy differentiate by

- Working pressure:** 20 bar +20°C-on
- Burst pressure:** 60 bar +20°C-on
- Temperature:** -20°C / +140°C (nem használható gőzre)
- inside:** EPDM, fekete, sima
- outside:** EPDM, kék, sima

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Belső Ø (mm)	Falvastagság (mm)	Külső Ø (mm)	Súly (kg/m)	Szín	Cikkszám
9,5	3,5	16,5	0,25	Kék	999615
12,7	4,4	21,5	0,363	Kék	999618
19	4	27	0,45	Kék	999621
9,5	3,5	16,5	0,25	Piros	999616
12,7	4,4	21,5	0,363	Piros	999617
19	4	27	0,45	Piros	999619

