
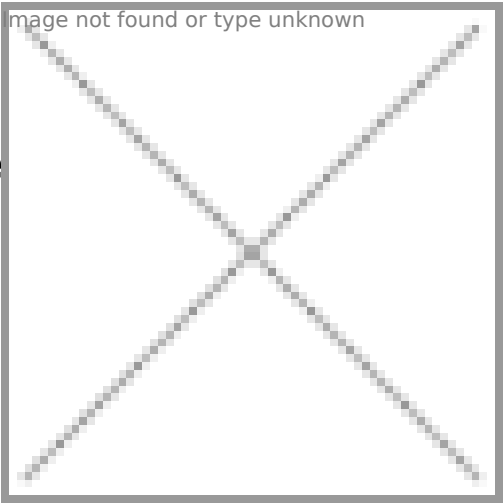


INDUCORD / Glass fibre fibre coating

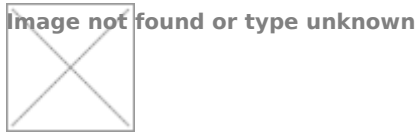

with vulcanized glass

re environment, as cooling water hose, or
works well in the glass and metal industry,
ooling water, or cable cooler. It's

Operating pressure: 20 bar

Bursting pressure: 60 bar

Heat resistance: up to +100°C for water, up to +550°C for radiating heat from the environment

Interior: EPDM rubber, white, electrically conductive, smooth

Exterior: seaed glass fibre cover, white

Linings: fabric linings

Certain diameters are available from stock. Meantime, we hold the right of selling the stock in products.

Inside Ø (mm)	Wall thickness (mm)	Outside Ø (mm)	Roll size (m)	Article number
13	6	25	40	3042 013025
19	6	31	40	3042 019031
25	7	39	40	3042 025039
32	8	48	40	3042 032048
38	10	58	40	3042 038058
40	8,5	57	40	3042 040057
42	9	60	40	3042 042000
45	8,5	62	40	3042 045062
50	10	70	40	3042 050000
76	10	96	40	3042 076096

