
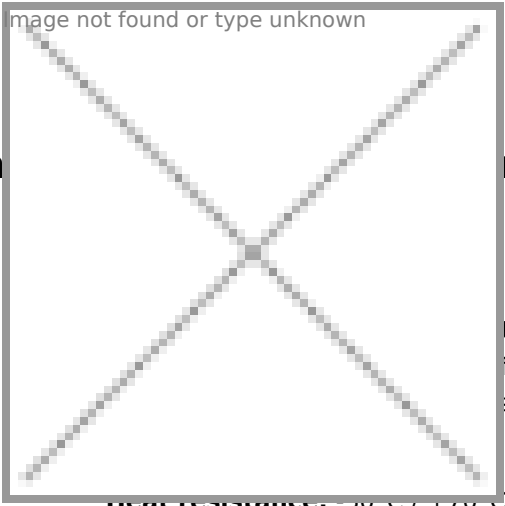


Kompressflat/yellow Latex hose

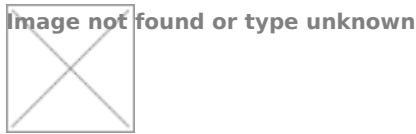

is lightweight. It's persistent against oils and acids. Its flexibility makes transport because of the lightweight and its features make the hose especially practical for use on scaffolds. The hose is ozone, ageing

Heat resistance: 50 °C / 170 °C

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

Inside Ø coll	Inside ø mm	Wall thickness mm	Weight g/m	Operating/ Fracturing pressure (bar)	Roll size m	Article number
3/4	21,0-21,5	1,9	120	20/70	60	961001
1	26,5-27,5	1,9	150	20/70	60	961105