
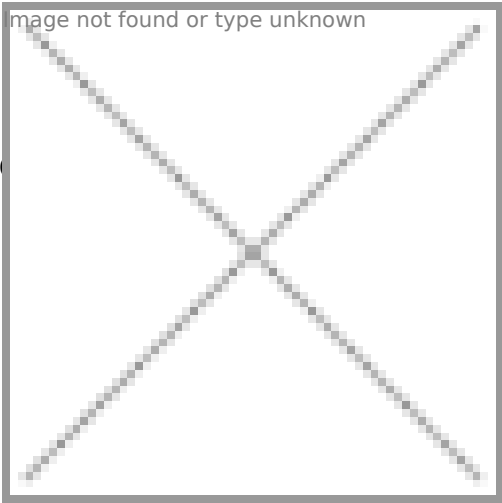


# Silibar/red Silicone hose reinforcement

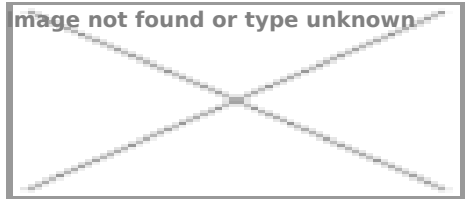

est. Size scale: DN 3-50 mm.

C for the polyester lining designed (up to  
: glass fibre reinforcement designed (over

**Interior:** transparent, smooth, USP class VI.

**Exterior:** red, smooth

**Hardness:** 70° Shore A

**Quality:** inside FDA CFR§ 177.2600 and BGVV

Storage lots, splitting of the rolls are possible. Meantime, we hold the right of selling the stock in products.

| Inside Ø<br>(mm) | Outside Ø<br>(mm) | Wall thickness<br>(mm) | Operating<br>pressure (bar) | Fabric reinforcement<br>material | Heat<br>resistance | Article<br>number |
|------------------|-------------------|------------------------|-----------------------------|----------------------------------|--------------------|-------------------|
| 4                | 9                 | 2,5                    | 13                          | polyester                        | +160 °C            | 189032            |
| 6                | 18                | 3                      | 12                          | polyester                        | +160 °C            | 189924            |
| 9,5              | 16                | 3,25                   | 12                          | polyester                        | +160 °C            | 189944            |
| 10               | 18                | 4                      | 12                          | polyester                        | +160 °C            | 189928            |
| 12,5             | 20,5              | 4                      | 10                          | polyester                        | +160 °C            | 189921            |
| 19               | 30,6              | 5,5                    | 6                           | glass fibre                      | +180 °C            | 189922            |
| 25               | 37                | 6                      | 5                           | glass fibre                      | +180 °C            | 189920            |