



**TW tanker truck unload
piece**

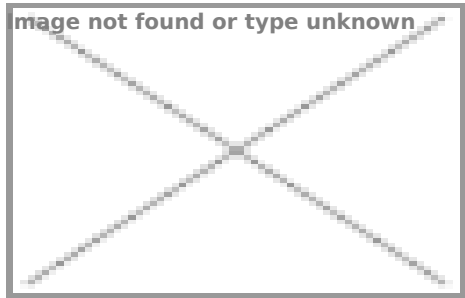

female hose crown

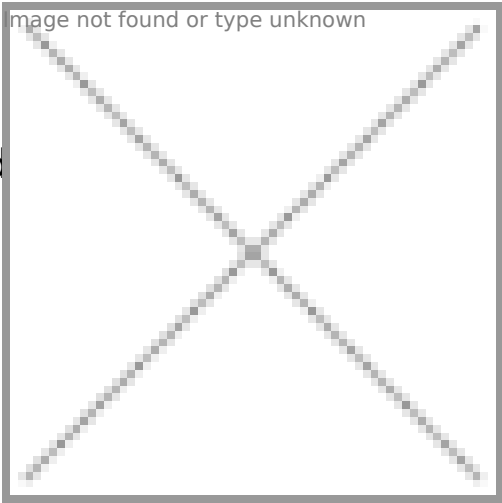

thread sealing and a NBR sealing ring.
flon thread sealing and hypalon gasket.

The complete female consists of the MKH tension lever and the MVK sealing crown piece.

Standard: DIN 28450 EN ISO 14420-6

Operating pressure: 16 bar

The product is a permanent storage lots. Meantime, we hold the right of selling the stock in products.

DN		Female thread	Nominal size	Article number
50	brass	G 2"	TW 1502	5581 050000
50	stainless steel	G 2"	TW 1502	5584 050000
80	brass	G 3"	TW 502	5581 075000
80	stainless steel	G 3"	TW 502	5584 075000